



INSTALLATION GUIDE

TOYOTA RAV4 05-19 ON

PN: BT139SY

EDGE MODELS



BULLBAR WITH BUMPER LIGHTS
VEHICLE FRONTAL PROTECTION SYSTEM (VFPS)
FOR AIR BAG & ADR COMPLIANT VEHICLES

INDEX

PAGE 3

Installation Kit

PAGE 4

Stage 1 - Vehicle Testing And Preparation
Stage 2 - Bumper Removal
Stage 3 - Bumper Reinforcement Removal

PAGE 5

Stage 4 - ECB Steel Mount Installation
Stage 5 - Parking Sensors

PAGE 6

Stage 6 - Camera Removal
Stage 7 - Camera Fitment
Stage 8 - Light Wiring

PAGE 7

Stage 8a - Light Wiring - Light With Heat Sink On DRL

PAGE 8

Stage 8b - Light Wiring - Hybrid Light, Blank Rear

PAGE 9

Stage 9 - Bumper Cut
Stage 10 - Bumper Re-Fitment
Stage 11 - Indicator Light Installation

PAGE 10


Stage 12 - Clip Lock Trim Fitment
Stage 13 - Protection Bar Installation
Stage 14 - Bumper Light Installation
Stage 15 - Check And Test

PAGE 11


Final Checks

INSTALLATION KIT

1 - Steel Mounting Bracket	2 - M6 Spring Washers
2 - 30mm Round Spacer Washer	2 - M6 Nuts
6 - M12 X 1.25 X 40mm Bolts	2 - M6 Nyloc Nuts
12 - M12 Flat Washers	1 - ECB Indicator / DRL / Park Light Kit
6 - M12 Spring Washers	1 - Bumper Light Kit
6 - M12 X 1.5 Nuts	1 - Quick Click Kit (IC10D40S1004ECBH)
4 - M10 X 1.5 X 50mm Bolts	2 - Quick Click Kit (IC19TOR4SP1H)
6 - M10 Flat Washers	4 - Bumper Light Surrounds
4 - M10 Spring Washers	1 - 2400 Mm Length 6mm Clip Lock
4 - M10 X 1.5 Nut And Washers On 300mm Wire	1 - 200mm Length Five Core Wire
4 - M6 X 20mm Bolts	10 - Solder Joiners
4 - M6 Flat Washers	1 - 250mm Length 10mm Convolved Tube

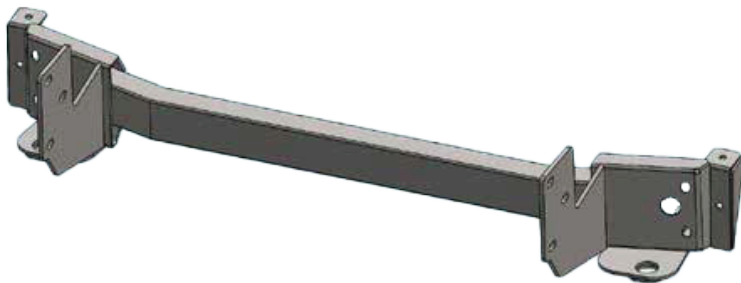

ECB Steel Mounting Bracket - Front View
(YBT134)
FITTED TO BAR

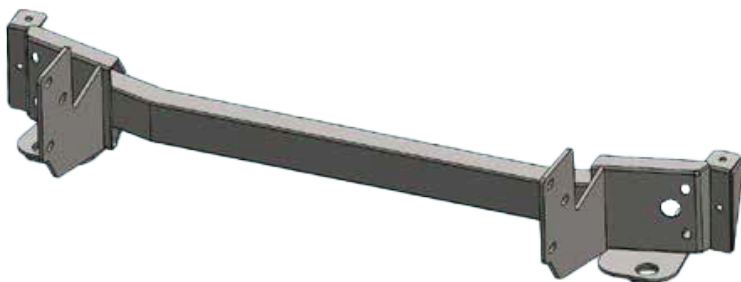

ECB Steel Mounting Bracket - Rear View
(YBT134)
FITTED TO BAR



Sensor Outer Mount



Sensor Inner Mount



2 x 30mm Round Spacer Washer
(BH32SY_A8MS) - P/C Black
IN BOLT KIT

TOYOTA RAV4 05-19 ON

STAGE 1 - VEHICLE PREPARATION

Test drive vehicle to ensure all driver assists are correctly working and to gauge effectiveness.

Park on a flat level surface.

Apply parking brake and lift bonnet.

Unwrap ECB Protection Bar and disconnect mounts.
Discard bolts.



STAGE 2 - BUMPER REMOVAL

On top of bumper remove four (4) x 10mm head bolts, five (5) x push pull clips. Remove plastic trim.

From underside of vehicle remove eight (8) x 10mm head bolts.

On inner guards remove one (1) x 10mm head bolt and two (2) x push pull clips (per side). Carefully unclip wheel arch mold from inside while pulling outwards.

Carefully pull out on rear wing to unclip from guard.

Disconnect wiring from bumper.



STAGE 3 - BUMPER REINFORCEMENT REMOVAL

Remove polystyrene infill from bumper reinforcement.

Disconnect wiring from bumper reinforcement.

Remove bumper reinforcement by removing three (3) x 14mm head bolts per side.



STAGE 4 - STEEL MOUNT INSTALLATION

Fit steel mounting bracket (supplied) onto the end of chassis rail using original equipment bolts. Place one (1) x 30mm spacer washers per side (supplied) between chassis rail and steel mounting bracket on locator pin.



Remove lower Alloy crash can one side at a time by removing one (1) x 19mm head bolt, two (2) x 12mm head nuts and one (1) x 12mm head bolt per side.

Using steel mounting bracket as a guide, drill two (2) x 10mm holes into under side of rail. Enlarge hole in side of rail to fit nut and washer on wire.

BLOW FILINGS CLEAR AND TREAT ALL EXPOSED METAL WITH A RUST INHIBITOR.

Use M10 x 1.5 x 50mm bolt and flat washer on wire, flat washer, spring washer and nut (supplied).

Refit crash cans.

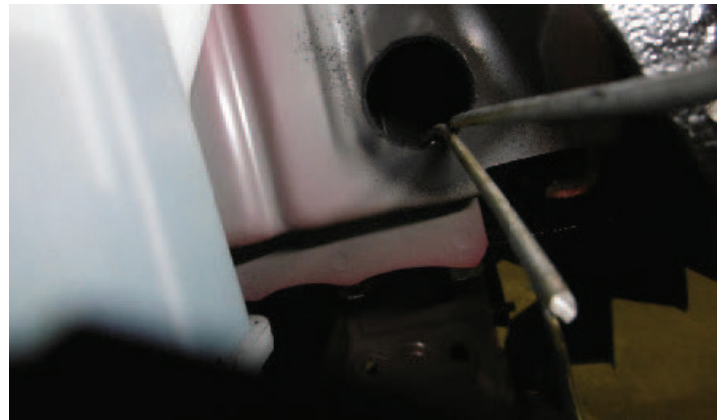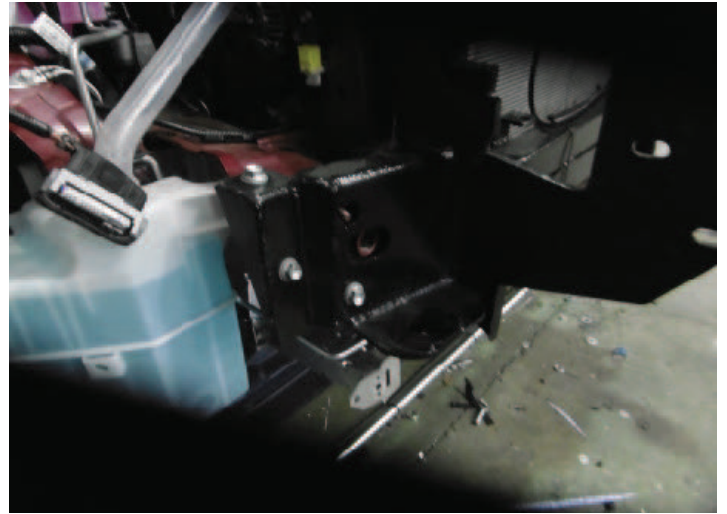

STAGE 5 - PARKING SENSORS

Remove parking sensors from bumper.

Relocate parking sensor into sensor housing in Protection Bar. **CAUTION:** Sensor plugs and mounts are directional. There is a raised segment on front under clip area of sensor.

Using Quick click harness (supplied), feed harness through sensor holes in bumper cover and connect to original equipment wiring harness.

NOTE: Holes in bumper will need to be enlarged to allow wiring harness to fit through. Try to feed wiring in an area where it will be least seen by the customer.



TOYOTA RAV4 05-19 ON

STAGE 6 - CAMERA REMOVAL


Remove camera from bumper, two (2) x Phillips head screws.

Extend camera wiring harness 200mm using wire and solder joiners (supplied). Place wiring into convoluted tubing (supplied).



STAGE 7 - CAMERA FITMENT

Place camera into protection bar using two (2) x M6 bolts, flat washers and Nyloc nuts (supplied).

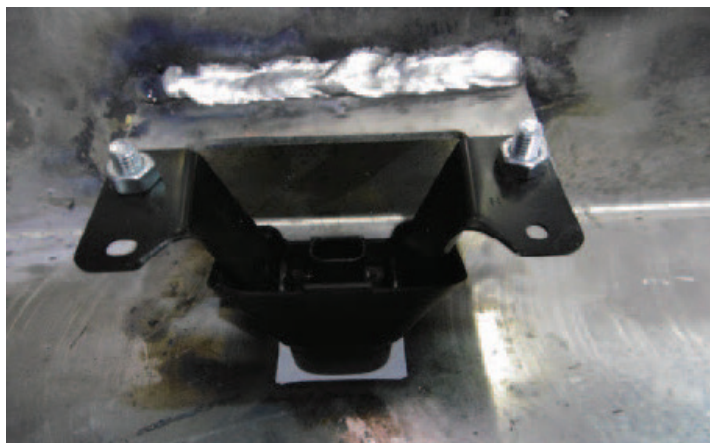

STAGE 8 - LIGHT WIRING


On this vehicle there are two types of headlight - a hybrid headlight and a standard halogen headlight.

NOTE: Both headlights look similar from the front.

For the purposes of wiring the lights there is a main factor to tell them apart. On the rear outer corner of the headlight, behind the edge of the DRL on the standard light is a black connector connected to an Aluminium heat sink. On the other light the connector and heat sink are missing and the casing has been left blank.

Stage 8A (NEXT PAGE) is the wiring for the Halogen style headlight.

Stage 8B (NEXT PAGE) is the instruction for the full LED headlight. This is technically advanced, so if you are not confident regarding wiring to the inside of the vehicle, please consult an auto electrician.

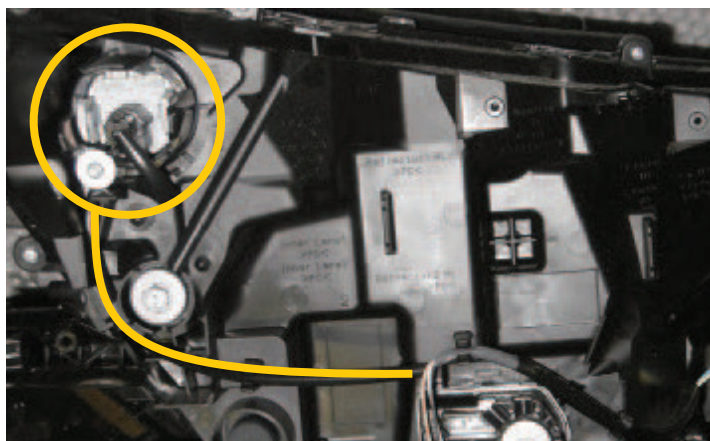

STAGE 8A - LIGHT WITH HEAT SINK ON DRL

Splice ECB wiring harness into wiring harness behind headlight. Two wires are used on the headlight and two wires on the headlight main connector.



Find indicator and DRL connector on inside and outside of rear of light respectively. With lock to top, Pin 1 is on the left side of the plug.

- + Positive wire » Indicator Plug pin 1
- + Positive wire » Park Plug pin 2
- + Positive wire » Main Light Harness pin 4
- Earth wire » Main Light Harness pin 12

Ensure harness is clear of sharp edges and moving parts.

Connect ECB Quick Click bumper light wiring harness (supplied) into original wiring harness.

It is recommended to solder and cover all connections on this light.

Indicator Plug



Park Plug



Wiring Information



TOYOTA RAV4 05-19 ON

STAGE 8B - HYBRID LIGHT, BLANK REAR

Fitment to the headlight is as per the wiring of the non-hybrid headlight as specified in Stage 8A. From the headlight the signal for the indicator, DRL and earth (ground) can be found on the rear of the headlight. Signal for the parking light is found within the steering column.

PARKING LIGHT

Carefully press sides of steering column trim from under the join to unclip the top of the trim.

Unclip both sides and front.

CAUTION: Top of the steering column trim is attached to the dash panel. **Do not** remove.

Turn the steering wheel to access and remove two PK screws.

Remove PK screws from lower centre of trim.

Remove lower trim.

Under the steering column locate the yellow plug.

DO NOT REMOVE THIS PLUG, it is attached to the air bag system. Any electrical spark or rough handling could cause the airbags to deploy. Care is required.



Beside the yellow plug is a black plug, remove this plug for ease of access.

Attach wire to the light grey/black (pin 7) of this plug.

Carefully refit plug. Refit trim.

Run wiring to passengers side of vehicle, through firewall and forward to both headlights. Encase wiring in split loom tubing and zip tie to existing wiring of vehicle.

Connect and test all wiring.

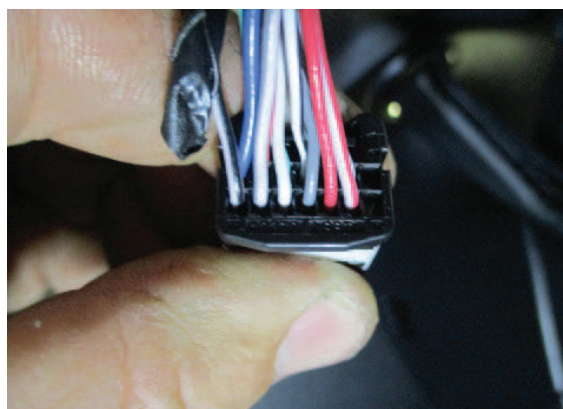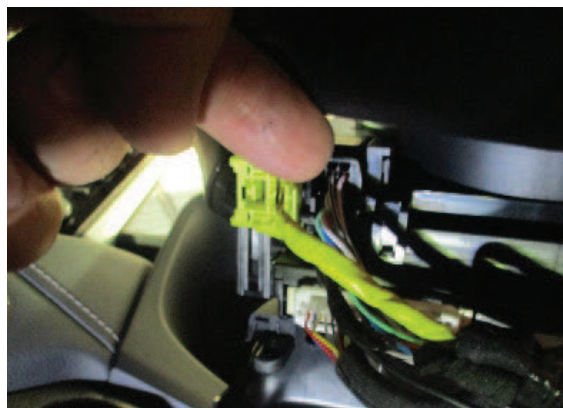


STAGE 9 - BUMPER CUT

Mask bumper ready for bumper cut. Using sharp scissors cut template (supplied) from this instruction. Align template on bumper and mark cut area.


Double check cut lines.

Neatly cut bumper to fit over steel mounting brackets using template provided.

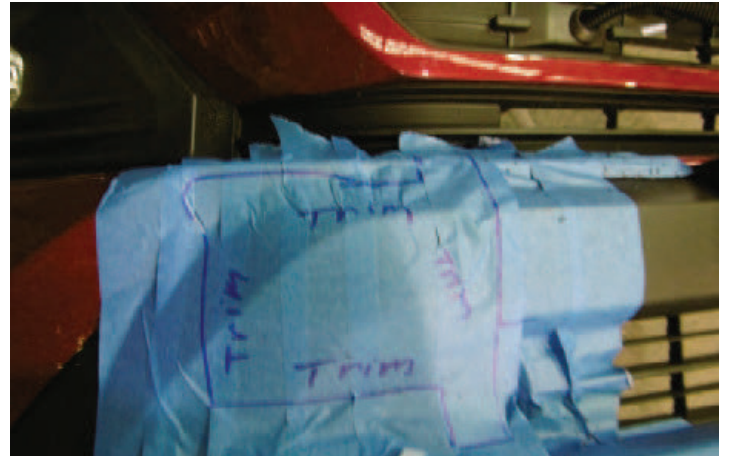

STAGE 10 - BUMPER RE-FITMENT

Refit bumper to vehicle in the reverse of stage 2, using original equipment fixings.

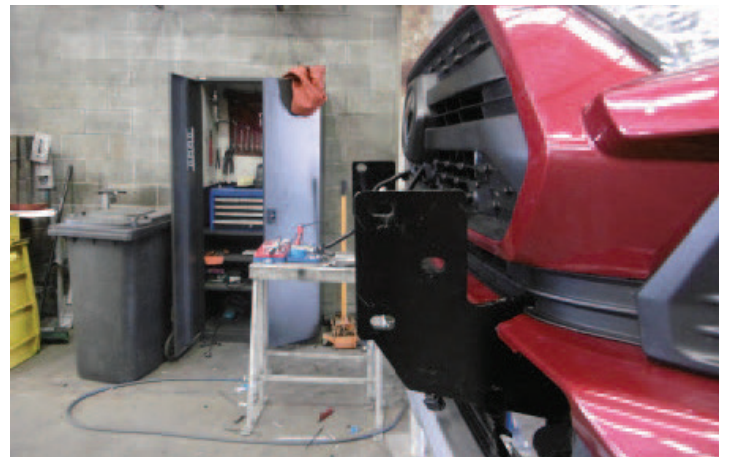

STAGE 11 - INDICATOR/PARK LIGHT INSTALLATION

Fit ECB LED indicator/DRL /park lights into Protection Bar as per instructions supplied with the LED indicator kit.

NOTE: Ensure park light is to top.




TOYOTA RAV4 05-19 ON

STAGE 12 - CLIP LOCK TRIM FITMENT

Attach 6mm clip lock trim (supplied) to top of ECB Protection Bar.

NOTE: Trim off lower edge on an angle so trim will sit flush with end of Protection Bar.

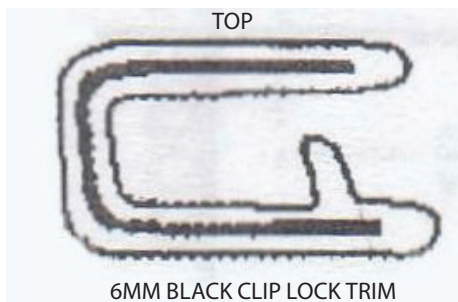

STAGE 13 - PROTECTION BAR INSTALLATION

Fit ECB Protection Bar onto steel mounting brackets using three (3) x M10 X 1.5 x 40mm bolts, flat washers, spring washers and nuts per side (supplied).

Align Protection Bar with vehicle.

Tighten all bolts.

Check sensors and for correct operation.



STAGE 14 - BUMPER LIGHT INSTALLATION

Attach ECB bumper lights to Protection Bar.

Place M6 x 20mm bolts, spring washers (supplied) through light mount from inside and attach nut to top. Slide assembly into light mount in Protection Bar and centralize light to hole. **TIGHTEN FIRM ONLY.**

Install bumper light surrounds (supplied) to bumper light openings and tow hook openings. Large side of surround to inside of opening.



STAGE 15 - CHECK AND TEST

Connect and check all lights.

Test drive vehicle to ensure the correct operation of all driver assists.

FINAL CHECKS

ENSURE NUMBER PLATE IS CLEARLY VISIBLE

Note: When fitting/refitting the licence plate to the vehicle, ensure there is no obstruction to licence plate vision in accordance with local authorities. If required relocate licence plate to an alternate location.

FURTHER VFPS NOTES

1. Do not attach VFPS to the vehicle using anchorages not intended for this purpose (e.g. engine mounting bolts)
2. Do not use this product for any vehicle make or model, other than those specified by the VFPS manufacturer
3. Do not remove the plaque or label from the VFPS
4. Do not modify the structure of the VFPS in any way
5. No accessory or fitment should project forward of the VFPS forward profile

IMPORTANT INFORMATION

Periodically check bolts and nuts for correct tightness, especially if traveling on rough roads.



1800 069 145
WWW.ECB.COM.AU
29 SNOOK ST CLONTARF, QLD 4019

REPLACES: 13.07.20
REVISED: 09.07.24